

# NEMA 3R

## **Outdoor Modular Enclosure**



#### **Standard Features**

NEMA 3R - Protects Against Rain, Sleet, Snow and Splashing Water Powder Coated Aluminum Enclosure Solar Shield Roof Indoor / Outdoor Insulated Roof, Panels and Doors with R12 Insulation Material Multi-Point Latching System for each Door 20 Amps, 120 VAC GFCI Power Outlet Lifting Brackets Exhaust Fan with Programmable Timer Air Flow Sensor (with Alarm Contacts) Grounding Terminal Removable Doors Eye Wash Station Internal Lighting Complies with Zone 4 Seismic Requirements

### **Optional Features**

2000 BTU/Hr HVAC (Air Conditioner with Heat Package) 4000 BTU/Hr HVAC for Extreme Temperatures Stainless Steel Enclosure Hydrogen Sensor Battery Racks Battery Racks Battery Spill Containment Battery Charger Breaker Panel Heat Exchanger\* Heater Panel\*

\* Can be replaced for HVAC system.

Specifications subject to change without notice

La Marche multiple entry NEMA 3R enclosure allows for easy access for installation. This environmentally controlled battery enclosure can accommodate a wide range of battery sizes prolonging battery life. Modular Enclosure design allows for future expansion.


This NEMA 3R Battery Enclosure is designed to maintain safe levels of released hydrogen through two methods of ventilation. One method is a thermostatically controlled ventilation fan that's also controlled either by a timer or a hydrogen sensor. The other method is a passive ventilation feature that's inherited in the design of the enclosure.

> La Marche Mfg. (A U.S. Company) 106 Bradrock Drive, Des Plaines, IL 60018 Tel: 847.299.1188 Fax: 847.299.3061 sales@lamarchemfg.com www.lamarchemfg.com



## Specifications

Model	Dimensions (H x W x D) *	Weight **	Number of Doors
LME-N3R-9548	85.00" x 95.00" x 48.00"	1,400 lbs	4
LME-N3R-19048	85.00" x 190.00" x 48.00"	2,800 lbs	8

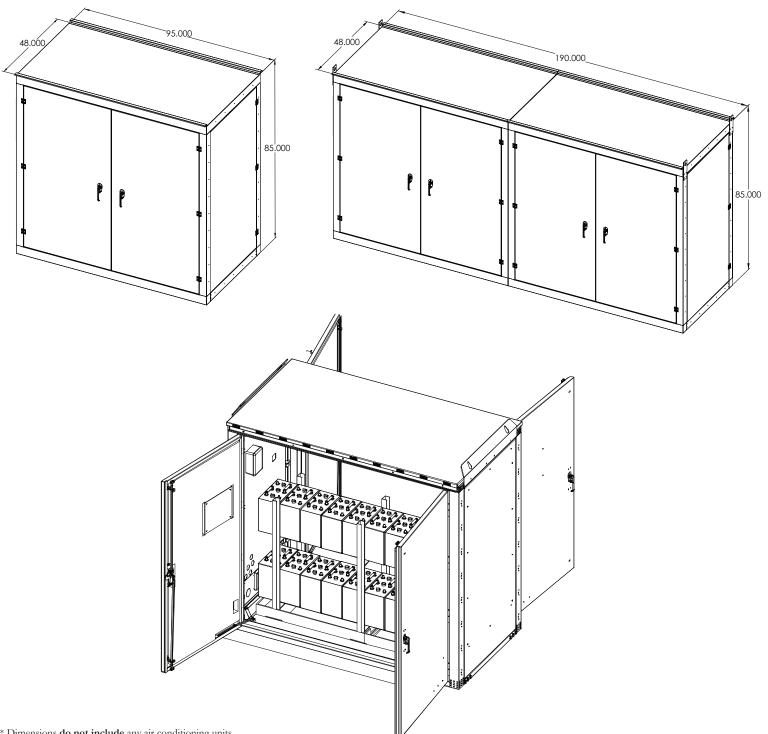

\* Dimensions <u>do not include</u> any air conditioning units. \*\* Weight <u>includes</u> a one 2,000 BTU air conditioning unit.